

GRAVITY CONVEYORS

RAIL WHEEL CONVEYORS

24 HOUR SHIPMENTS INCLUDE ALL 1-FOOT INCREMENTS 1'-0" TO 10'-0" ON MODEL RCD

SPECIFY MODEL NUMBER PER EXAMPLE

RCD1.5-9


RCD(wheel configuration*)-(length)

*Specify 1.5 for 1-1/2" staggered wheel pattern or 3 for 3" wheel pattern.



For replacement wheels, refer to part #BRW04600

NEW from Roach! Model RCD rail wheel conveyors! New rail wheel model RCD is available in two popular styles for 24 hour shipment. Model RCD-3 features wheels on 3" pattern while model RCD-1.5 includes 1-1/2" staggered dense wheel pattern.

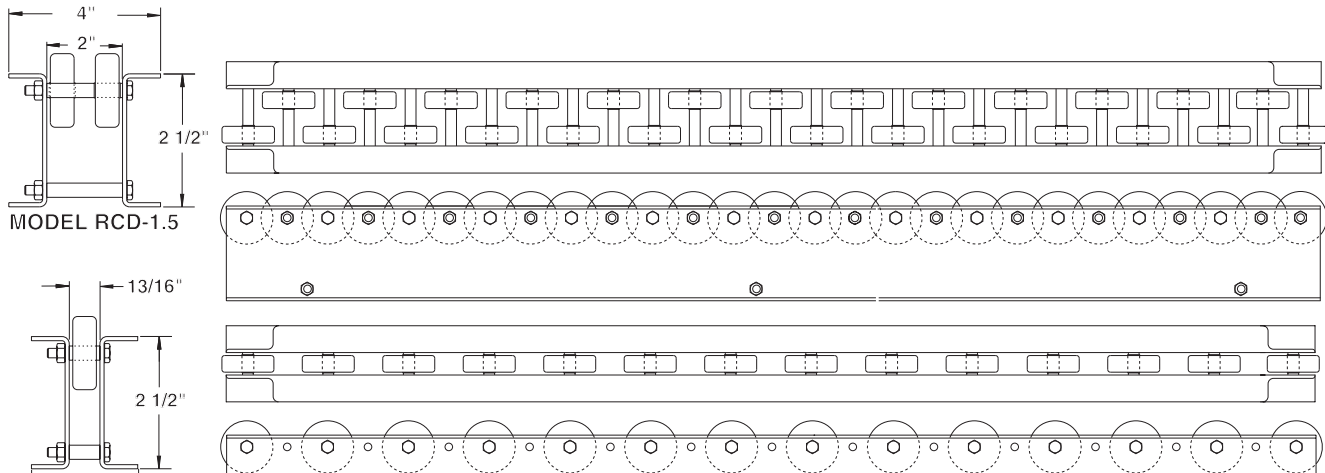

SPECIFICATIONS

RAILS: 12 ga. galvanized steel rails are formed to two varying width rail wheel conveyors, models RCD.

WHEELS: 1-15/16" dia. prelubricated ball bearing wheel with hardened raceway, zinc plated, 50 lb. capacity.

AXLES: 1/4" dia. galvanized steel bolt-type with lock nut.

LENGTHS: Available in 1'-0" increments from 1'-0" to 10'-0".

COUPLINGS: Not supplied, specify type required for pricing.

WHEEL CENTERS: Wheels provided on 3" centers with model RCD3; wheels provided on 1-1/2" centers, staggered pattern on model RCD1.5.

TECHNICAL DATA

MODEL	WEIGHTS PER FT. (LBS.)	WEIGHTS PER 10' (LBS.)	WHEELS PER FT.	MAXIMUM FRAME CAPACITY PER FT. (LBS.) 5' SUPPORT CENTER	MAXIMUM FRAME CAPACITY PER FT. (LBS.) 10' SUPPORT CENTER
RCD-1.5	4.3	43	8	130	35
RCD-3	3.4	34	4	130	35



■ 24 hour shipment